

Superfast Recovery Rectifier

DO-201AD
MUR460



Cathode  Anode

Features

- Low forward voltage drop
- Low leakage
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.054ounce, 1.549gram





Parameter	Symbols	MUR460	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Maximum Average Forward Rectified Current	I(AV)	4.0	A
Reverse Recovery Time. IF=0.5A, IR=1A, IRR=0.25A	Trr	35	ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	150	A
I ² t rating for fusing (1ms< t < 10ms)	I ² t	112.5	A ² S
Maximum Forward Voltage at 4A and 25 °C	VF	1.3	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=100 °C	IR	10 250	μA
Typical Junction Capacitance (Note1)	Cj	50	pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150	°C
Typical thermal resistance (Note 2)	RthJC	35	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.


Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

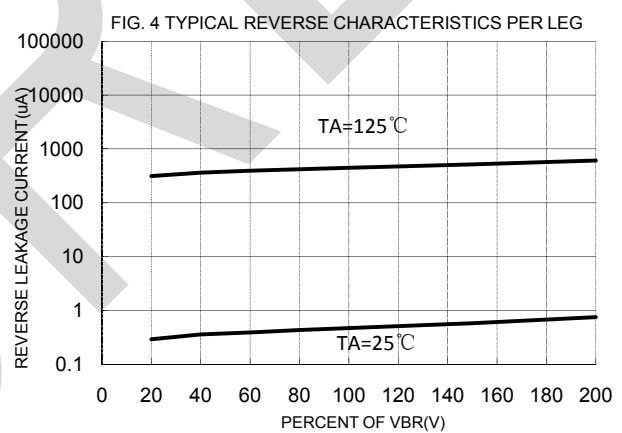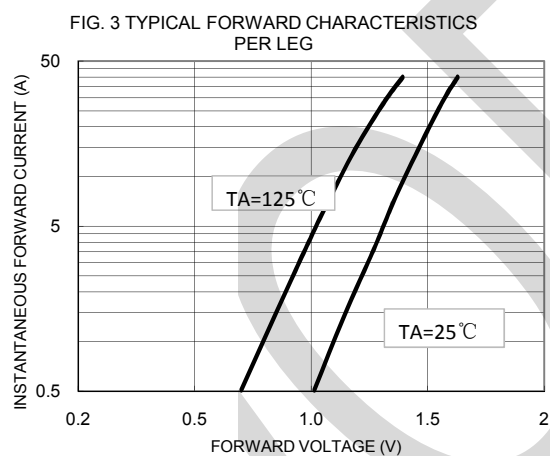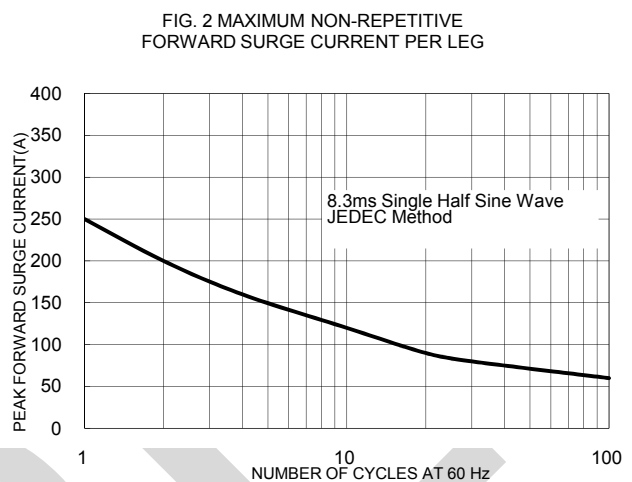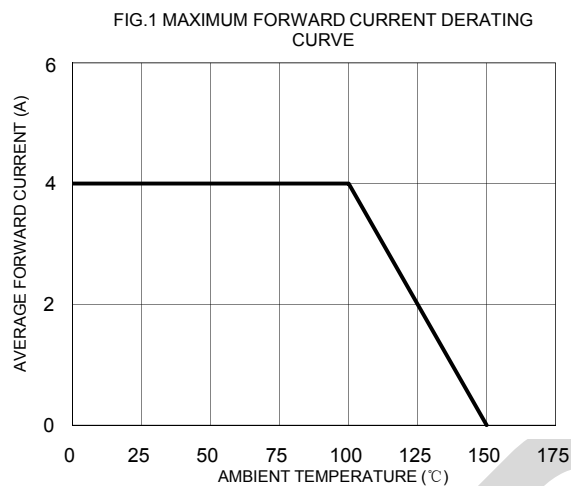

PACKAGE OUTLINE DIMENSIONS


DO-201AD

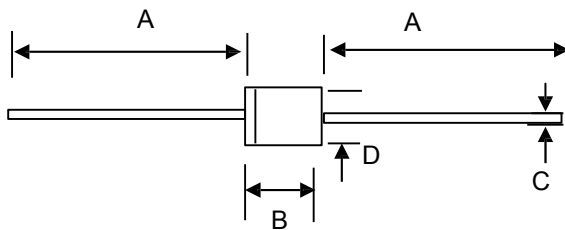

DO-201AD mechanical data


UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	55.12	208.67
	min	946.57	287.40	39.37	188.97

Marking Information

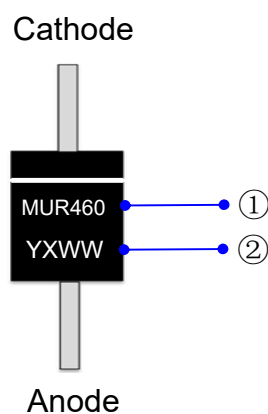


①Product model : MUR460

②PDC information:

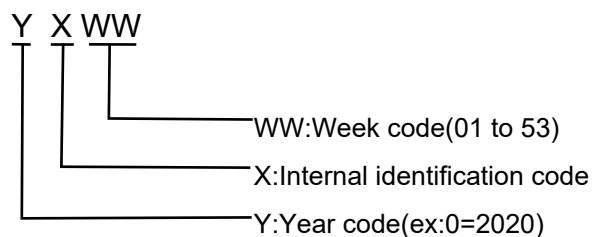


Packaging Information

1.Inside Box



2.Outside Box

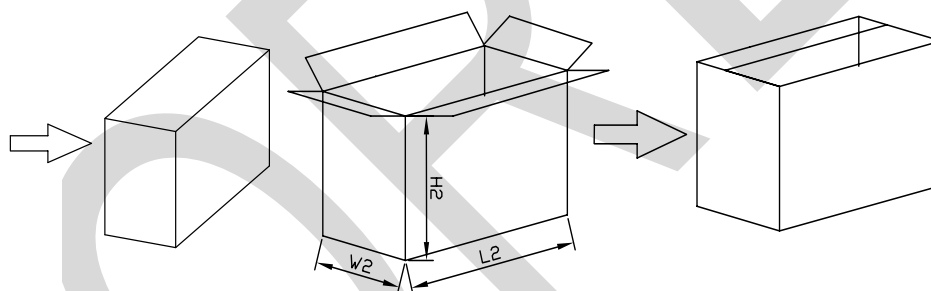

Packaging Information

NO	UNIT	Inside Box			Outside Box		
Size	mm	L1	W1	H1	L2	W2	H2
		255	75	1115	415	280	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm						