



Superfast Recovery Rectifier

MURE6060CT
TO-220AB

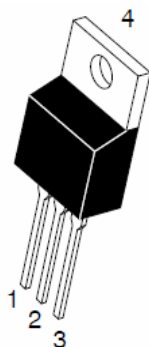

MURE6060CTF
TO-220F

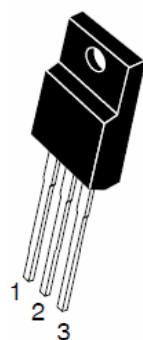

Features

- Low forward voltage drop
- Low leakage
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.054ounce, 1.549gram

Parameter	Symbols	MURE6060CT	MURE6060CTF	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600		V
Maximum RMS voltage	VRMS	420		V
Maximum DC Blocking Voltage	VDC	600		V
Maximum Average Forward Rectified Current	I(AV)	60.0		A
Reverse Recovery Time. IF=0.5A, IR=1A, IRR=0.25A	Trr	50		ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	300		A
I ² t rating for fusing (1ms< t < 8.3ms)	I ² t	373.5		A ² S
Maximum Forward Voltage at 30.0A and 25 °C	VF	1.65		V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=100 °C	IR	5 500		μA
Typical Junction Capacitance (Note1)	Cj	85		pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150		°C
Typical thermal resistance (Note 2)	RthJC	2.5	3	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.

Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

Fig.1 TYPICAL FORWARD CURRENT DERATING CURVE

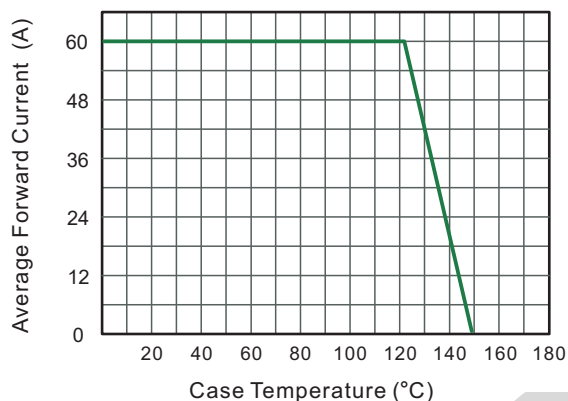


Fig.2 Typical Reverse Characteristics

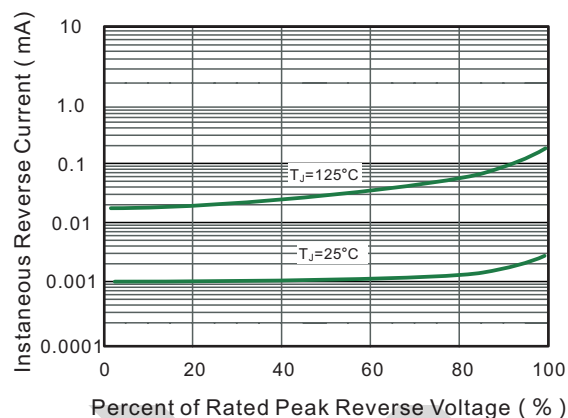


Fig.3 Typical Forward Characteristics


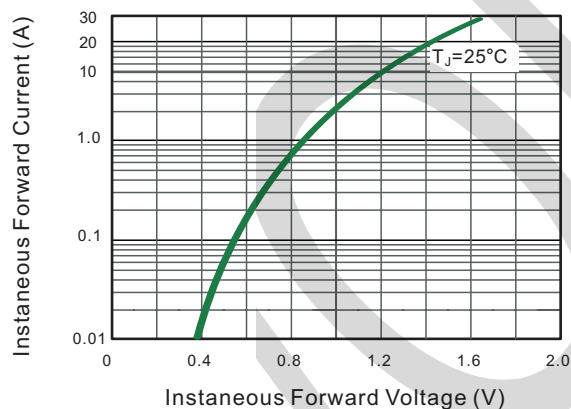



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

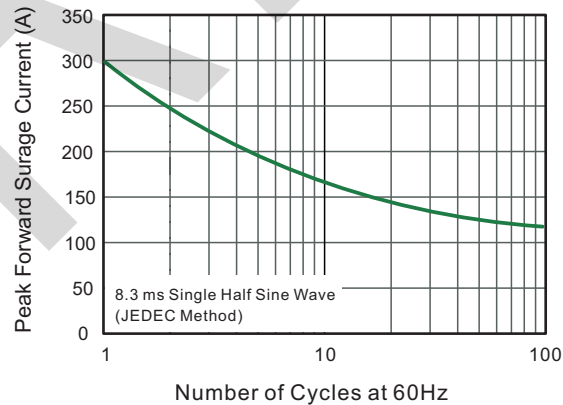


PACKAGE OUTLINE DIMENSIONS

Note:unit In(mm)

TO-220AB

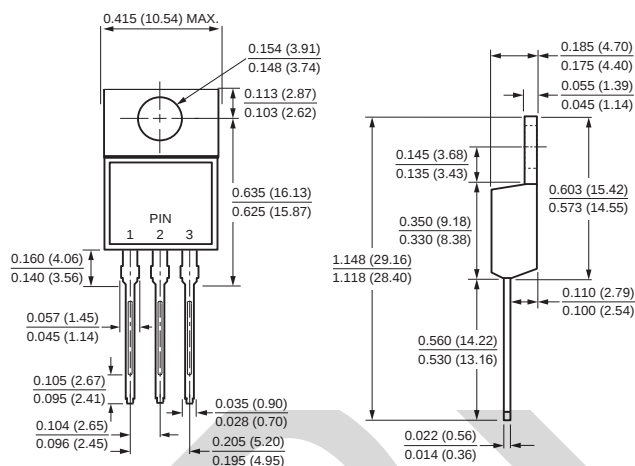


TO-220F

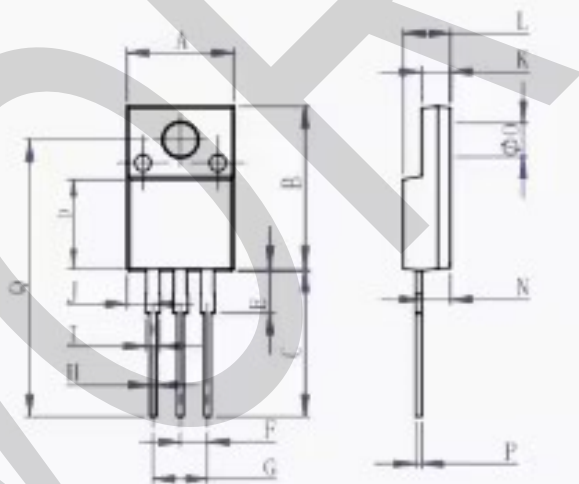

TO-220F mechanical data

UNIT		A	B	C	D	E	F	G	H	I	J	K	L	N	O	P	Q
mm	min	9.8	14.8	13.4	7.5	3.8	2.35	4.9	0.5	1.25	2.3	2.5	4.2	2.5	3.1	0.5	25.2
	max	10.2	15.2	13.8	8.5	4.2	2.75	5.3	0.7	1.45	2.6	2.9	4.6	2.9	3.4	0.7	25.8
mil	min	385.8	582.6	527.5	295.2	149.6	92.5	192.9	19.6	49.2	90.5	98.4	165.3	98.4	122.0	19.6	992.1
	max	401.6	598.4	543.3	334.6	165.4	108.3	208.7	27.6	57.1	102.4	114.2	181.1	114.2	133.9	27.6	1015.8


Marking Information

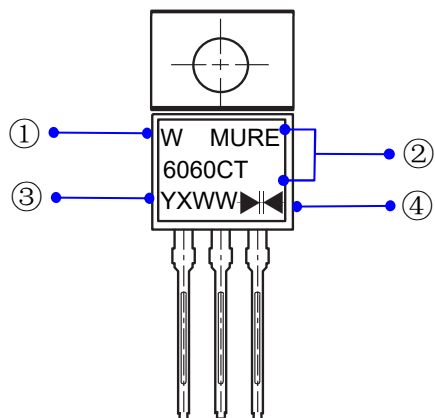

- ① W : Company's trademark
- ② Product model : MURE6060CT or MURE6060CTF
- ③ PDC information:
- Y X WW
- WW: Week code(01 to 53)
- X: Internal identification code
- Y: Year code(ex:0=2020)
- ④  Double wafer


Packaging Information

1. Tube Dimensions

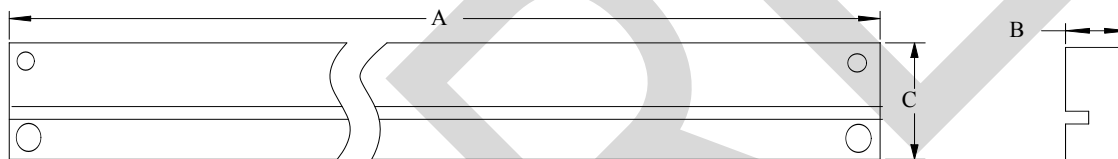

2. Inside Box

3. Outside Box

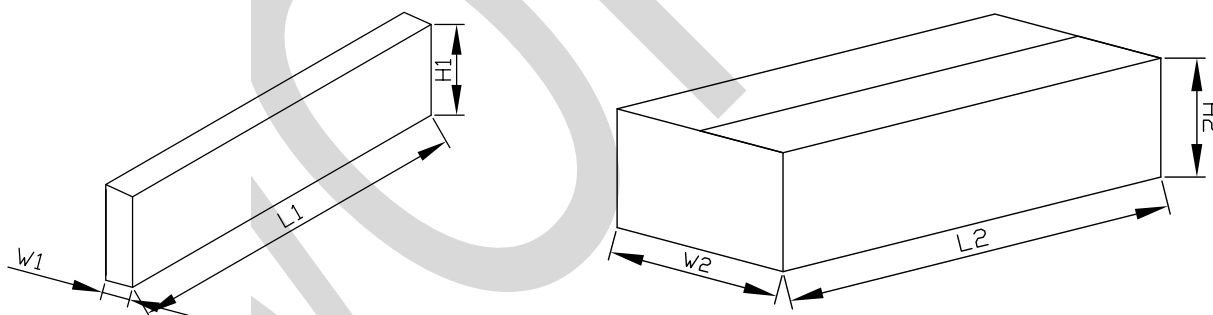

Packaging Information

NO	UNIT	Tube Dimensions			Inside Box			Outside Box		
Size	mm	A	B	C	L1	W1	H1	L2	W2	H2
		530	7	33	570	46	150	590	260	180
QTY	PCS	50PCS/Tube			Smallest package,1000PCS, 20 tube in total			5,000PCS/carton,5 boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm									