



SGT N-channel Power MOSFET

MTR7R1N10SD PDFN5x6

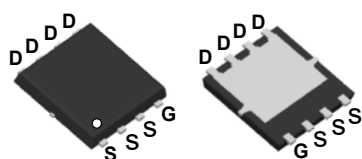

V_{DS}	100	V
$R_{DS(on),TYP@ V_{GS}=10V}$	6.1	mΩ
I_D	100	A

Features

- 1、Low on – resistance
- 2、High power package (PDFN5X6)
- 3、SGT N-channel Power MOSFET
- 4、Halogen free

Applications

- 1、Load Switch for Portable Devices
- 2、AC/DC Converter

Maximum ratings, at $T_A = 25^\circ\text{C}$, unless otherwise specified

Symbol	Parameter	Rating	Unit
$V_{(BR)DSS}$	Drain-Source breakdown voltage	100	V
V_{GS}	Gate-Source voltage	± 20	V
I_D	Continuous drain current @ $V_{GS}=10V$	$T_C=25^\circ\text{C}$	100
		$T_C=100^\circ\text{C}$	52
I_{DM}	Pulse drain current tested ①	$T_C=25^\circ\text{C}$	400
E_{AS}	Avalanche energy, single pulsed ②	473	mJ
P_D	Maximum power dissipation	$T_C=25^\circ\text{C}$	94
T_{STG}, T_J	Storage and Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Rating	Unit
R _{θJC}	Thermal Resistance, Junction-to-Case	1.3	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient	64	°C/W

Electrical Characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
--------	-----------	-----------	------	------	------	------

Static Electrical Characteristics @T_j=25°C (unless otherwise stated)

V(BR)DSS	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.2	1.7	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance ④	V _{GS} =10V, I _D =40A	--	6.1	7.2	mΩ

Dynamic Electrical Characteristics@T_j = 25°C (unless otherwise stated)

C _{iss}	Input Capacitance	V _{DS} =40V, V _{GS} =0V , f=1MHz	--	2052	--	pF
C _{oss}	Output Capacitance		--	268	--	pF
C _{rss}	Reverse Transfer Capacitance		--	13.5	--	pF
R _g	Gate Resistance	V _{DS} =0V, f=1MHz	--	2.5	--	Ω
Q _g	Total Gate Charge	V _{DS} =50V, I _D =50A , V _{GS} =10V	--	21.3	--	nC
Q _{gs}	Gate-Source Charge		--	4.6	--	nC
Q _{gd}	Gate-Drain Charge		--	6.2	--	nC

Switching Characteristics

Td(on)	Turn-on Delay Time	T _j =25°C, V _{GS} =10V, V _{DS} =50V, R _G =2.7Ω	--	15.3	--	ns
Tr	Turn-on Rise Time		--	90.1	--	ns
Td(off)	Turn-Off Delay Time		--	23.6	--	ns
Tf	Turn-Off Fall Time		--	52.4	--	ns

Source- Drain Diode Characteristics@ T_j = 25°C (unless otherwise stated)

VSD	Forward on voltage	I _{SD} =20A, V _{GS} =0V	--	0.87	1.4	V
Trr	Reverse Recovery Time	I _{SD} =20A di/dt=100A/μs	--	60.2	--	ns
Qrr	Reverse Recovery Charge		--	135	--	nC

NOTE: ① Repetitive rating; pulse width limited by max junction temperature.

② Limited by T_{Jmax}, starting T_J = 25°C, L=0.5mH, R_G=25Ω. Part not recommended for use above this value

③ The power dissipation P_{DSM} is based on R_{θJA} and the maximum allowed junction temperature of 150°C.

④ Pulse width ≤ 300μs; duty cycle ≤ 2%.

Typical Characteristics

Fig 1: Output Characteristics


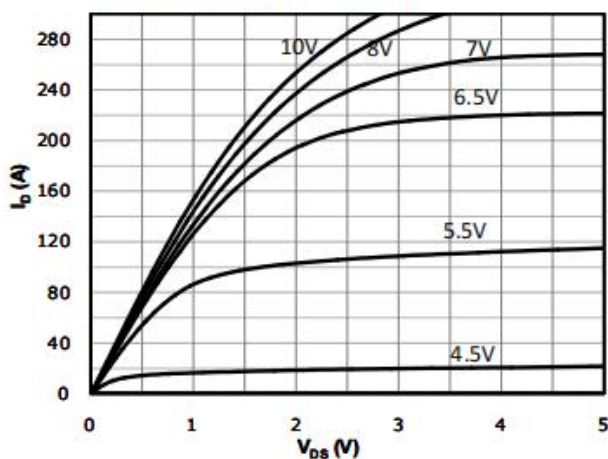


Fig 2: Transfer Characteristics

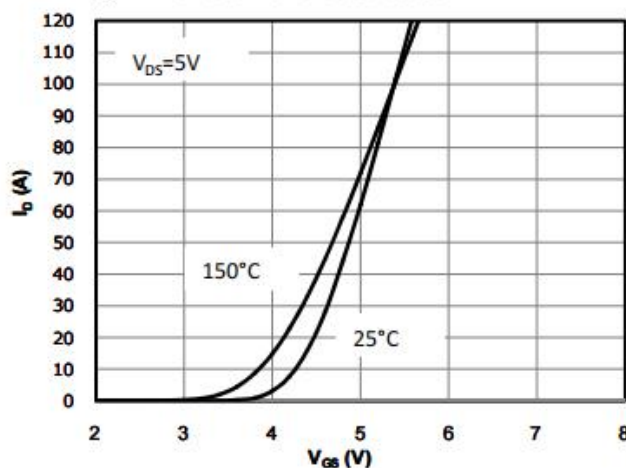

3: $R_{DS(on)}$ vs Drain Current and Gate Voltage

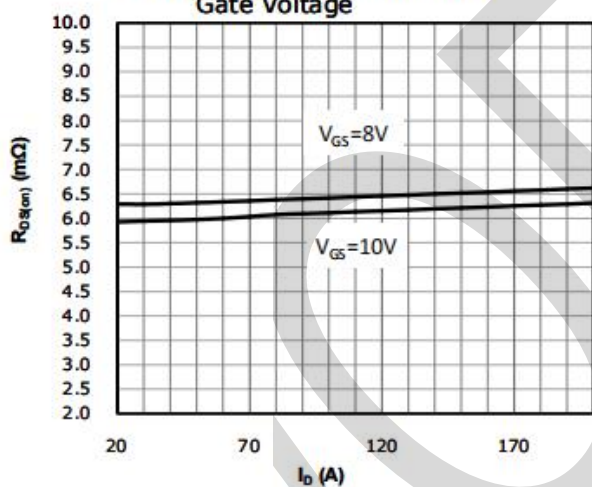


Fig 4: $R_{DS(on)}$ vs Gate Voltage

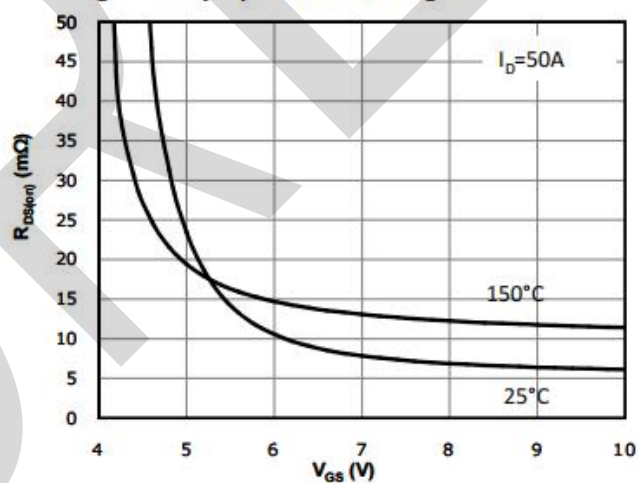


Fig 5: $R_{DS(on)}$ vs. Temperature


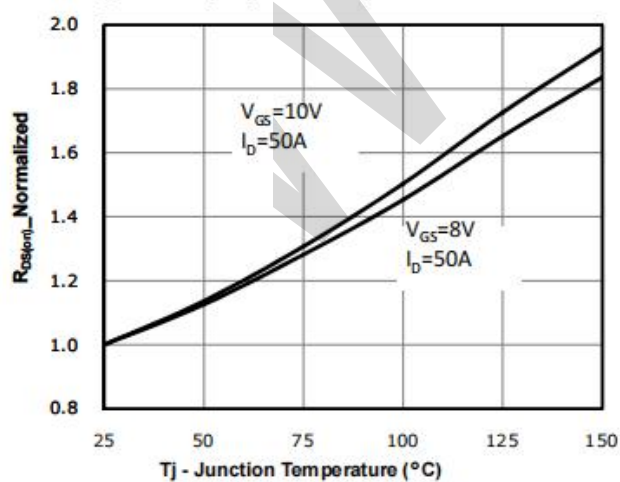


Fig 6: Capacitance Characteristics

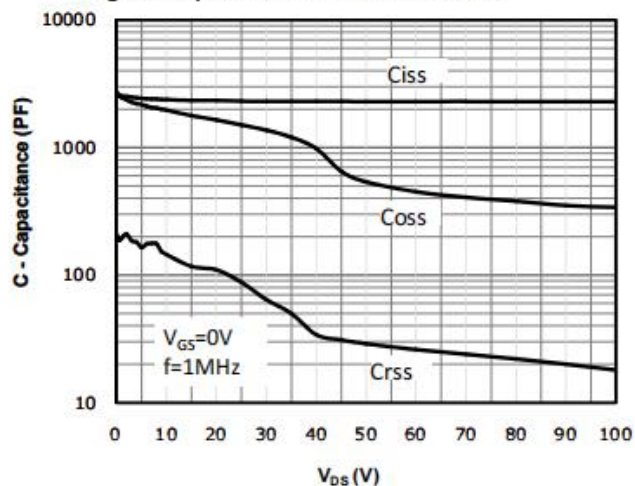

Typical Characteristics

Fig 7: Gate Charge Characteristics

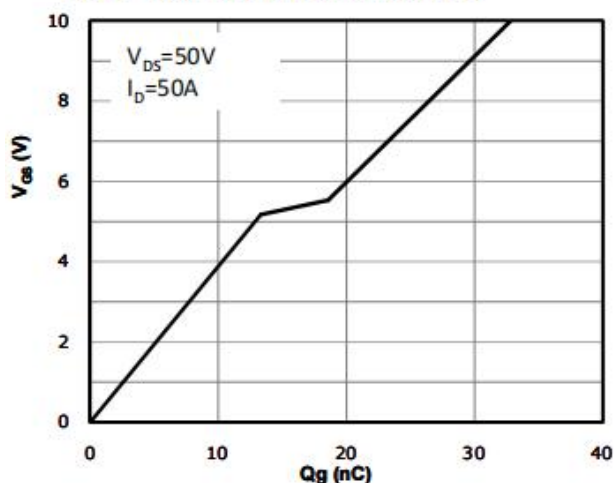


Fig 8: Body-diode Forward Characteristics

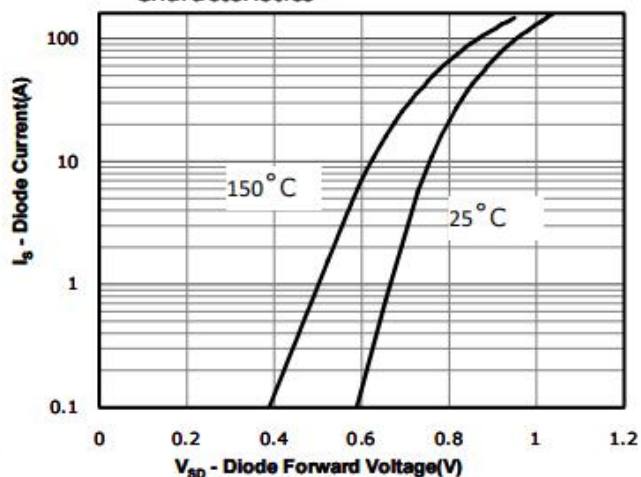


Fig 9: Power Dissipation

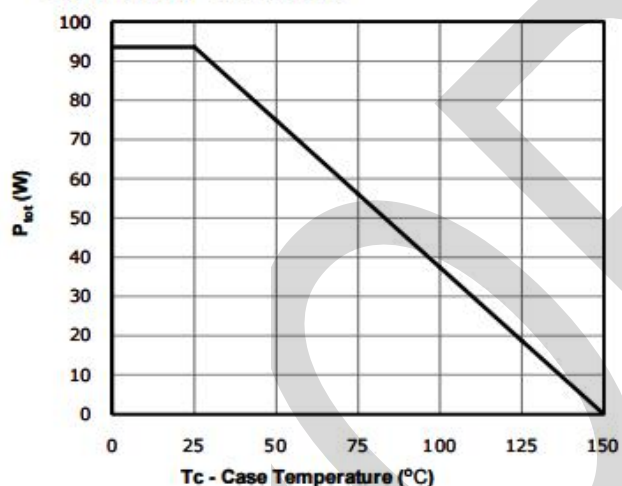


Fig 10: Drain Current Derating



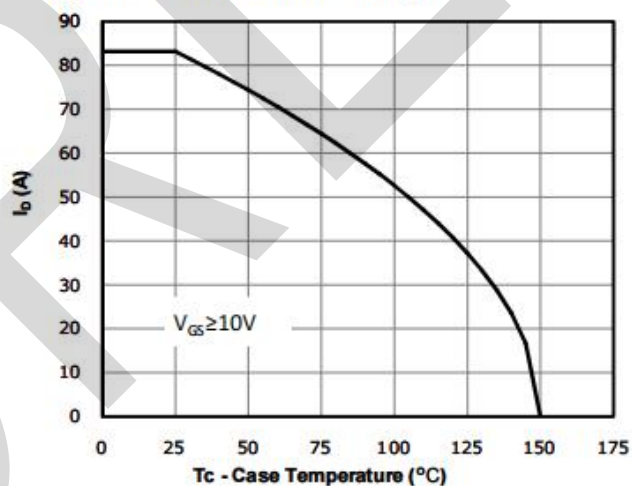


Fig 11: Safe Operating Area

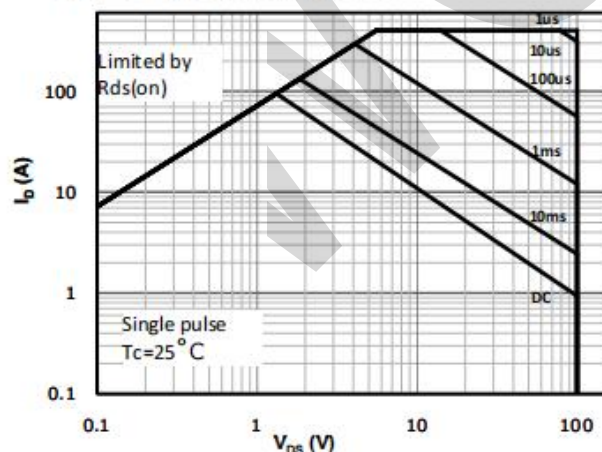


Typical Characteristics

Fig 12: Max. Transient Thermal Impedance

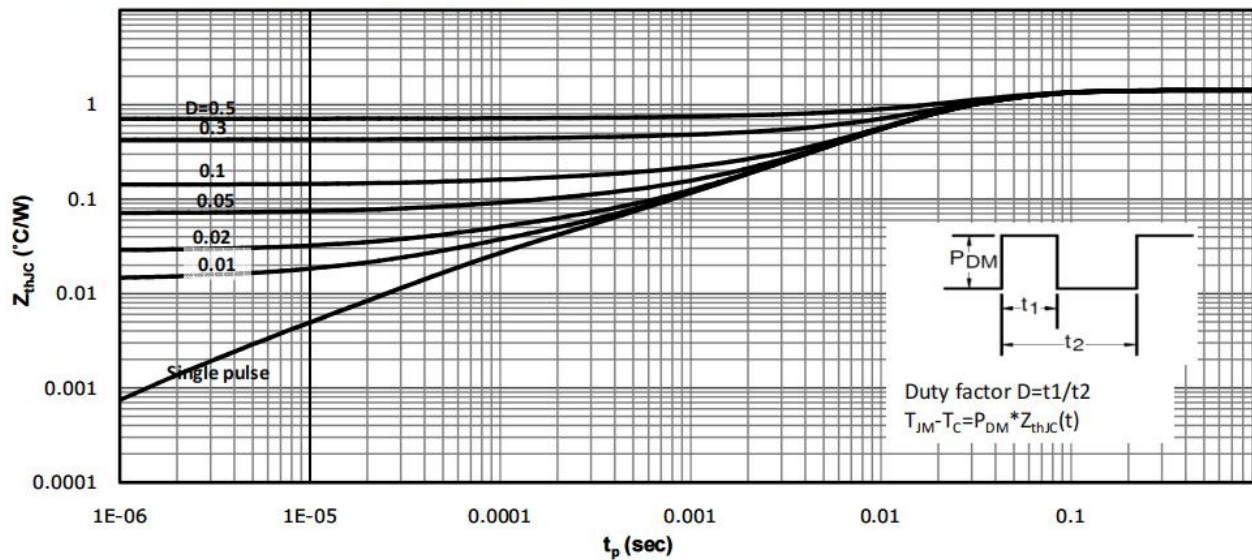


PACKAGE OUTLINE DIMENSIONS

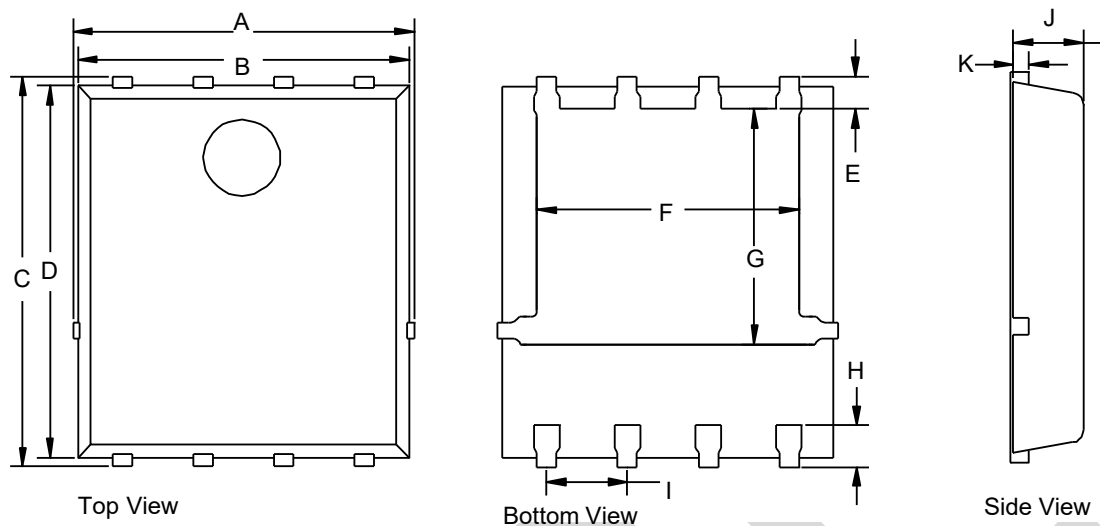

PDFN5x6 mechanical data

UNIT		A	B	C	D	E	F	G	H	I	J	K
mm	min	4.90	4.8	5.90	5.66	0.60	3.90	3.30	0.53	1.27	0.9	0.254
	max	5.55	5.4	6.35	6.06		4.32	3.92	0.76		1.2	
mil	min	192.9	188.9	232.3	222.8	23.6	153.5	129.9	20.8	50.0	35.4	10.0
	max	218.5	212.6	250.0	238.6		170.1	154.3	29.9		47.2	

PDFN5x6 Suggested Pad Layout

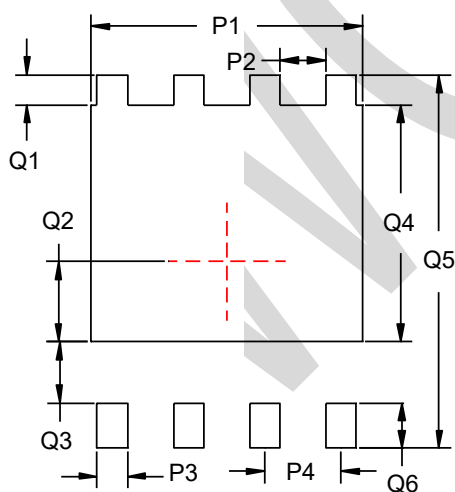

UNIT		P1	P2	P3	P4	Q1
mm	min	4.52	0.76	0.51	1.27	0.50
mil	min	177.9	29.9	20.07	50.0	20.0

UNIT		Q2	Q3	Q4	Q5	Q6
mm	min	1.34	1.02	3.97	6.25	0.76
mil	min	52.75	40.15	156.30	246.06	29.92