


Glass Passivated Bridge Rectifiers

PINNING

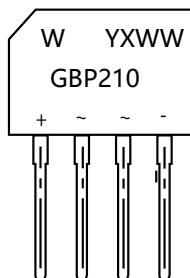

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

Features

- Compliant with RoHS Provisions
- Low forward voltage, high forward current
- High forward surge current capability
- High heat-conducting performance
- Thermal welding performance:
260 °C/10sec

Applications

- Switching Power Supply
- Home Appliances, Office Devices
- Industrial Auto-equipments

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.


Parameter	Symbols	GBP210	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	1000	V
Maximum RMS voltage	VRMS	700	V
Maximum DC Blocking Voltage	VDC	1000	V
Average Rectified Output Current	Io	2.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	60	A
I ² t rating for fusing (1ms < t < 8.3ms)	I ² t	15	A ² S
Maximum Forward Voltage at 1.0 A	VF	1.1	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=125 °C	IR	5 500	µA
Typical Junction Capacitance (Note1)	C _j	25	pF
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +175	°C
Typical thermal resistance (Note 2)	R _{thJC} R _{thJA}	15 40.0	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.


2. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.

Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

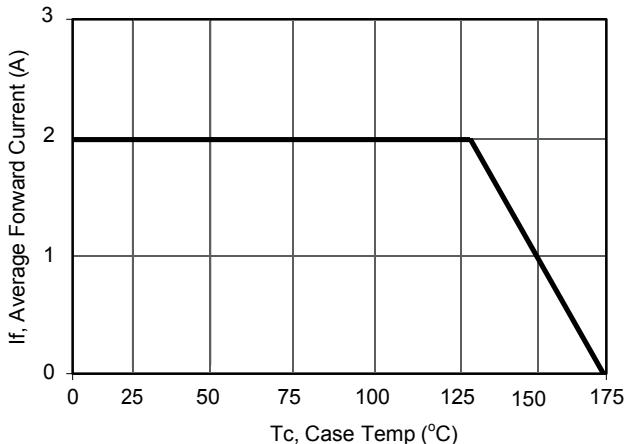


Current Derating, Case

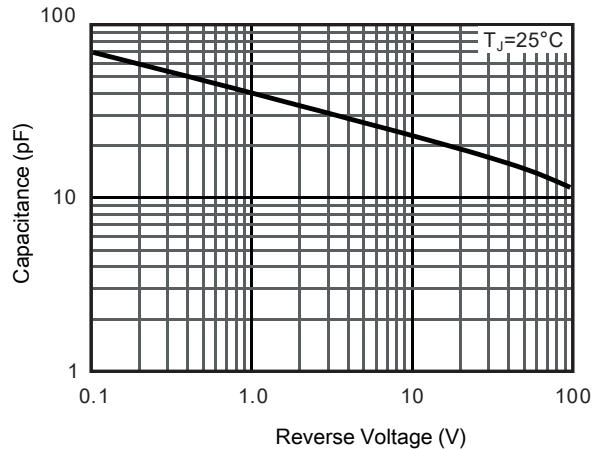

Typical Junction Capacitance

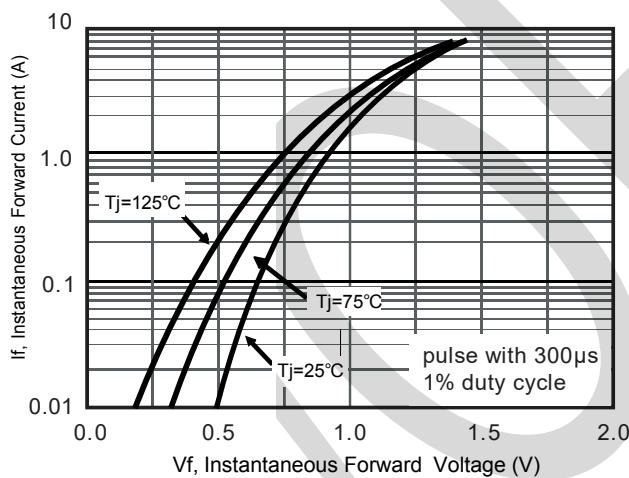


Typical Forward Voltage

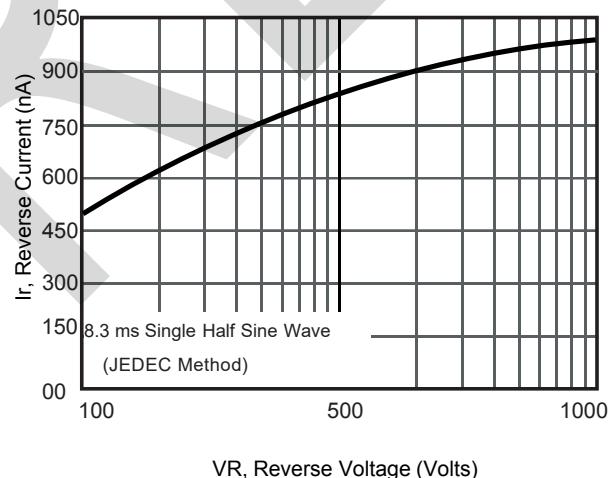

Typical Reverse Current

PACKAGE OUTLINE DIMENSIONS

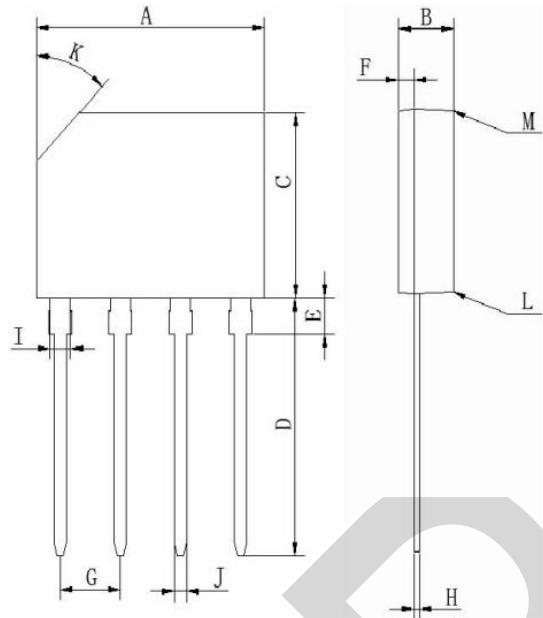

KBP Unit:mm		
DIM	MIN	MAX
A	14.25	14.75
B	3.35	3.65
C	10.2	10.6
D	14.3	14.8
E	1.8	2.2
F	0.8	1.1
G	3.56	4.06
H	0.3	0.55
I	1.22	1.42
J	0.76	0.86
K	2.7X45°(Typ.)	
L	—	3°
M	—	3°

All Dimensions in millimeter