


Surface Mount Fast Recovery Rectifier

ES3JSP/TO-277

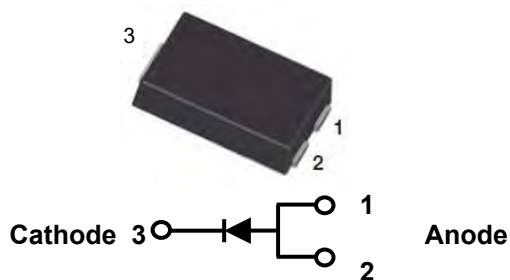

Marking:ES3J

Features

- Low forward voltage drop
- Low leakage
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end

■Maximum Ratings (T_a=25°C Unless otherwise specified)


Parameter	Symbols	ES3JSP	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Maximum Average Forward Rectified Current	I(AV)	3.0	A
Reverse Recovery Time. IF=0.5A,IR=1A,IRR=0.25A	Trr	35	ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	90	A
I ² t rating for fusing (1ms< t < 8.3ms)	I ² t	33.6	A ² S
Maximum Forward Voltage at 3.0A and 25°C	VF	1.7	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=100 °C	IR	5 100	μA
Typical Junction Capacitance (Note1)	Cj	45	pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150	°C
Typical thermal resistance (Note 2)	RthJA RthJC	42 12	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance between junction and ambient and between junction and lead mounted on P.C.B with 3mm*3mm copper pad areas.

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

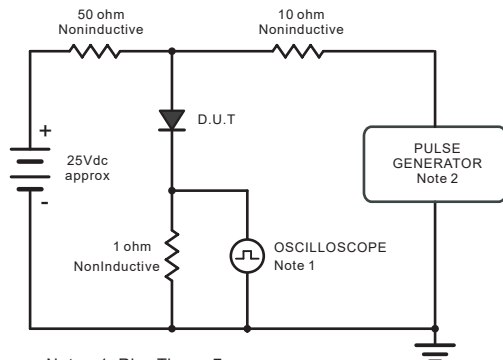

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

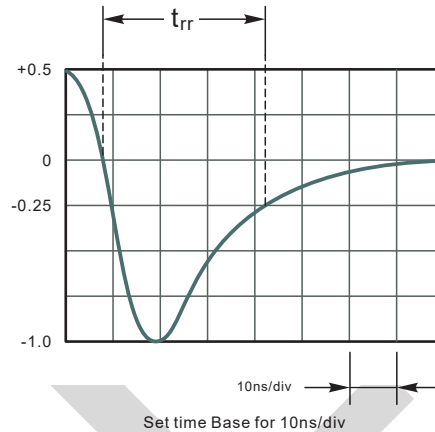


Fig.2 Maximum Average Forward Current Rating

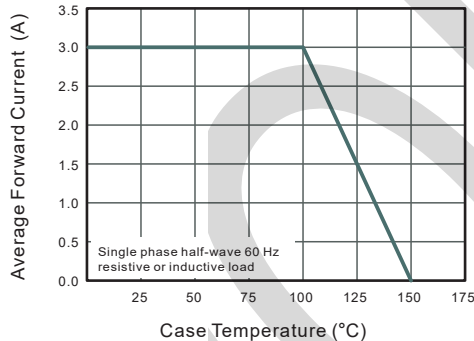


Fig.3 Typical Reverse Characteristics

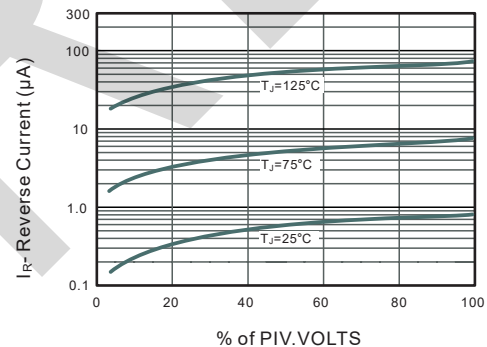


Fig.4 Typical Forward Characteristics



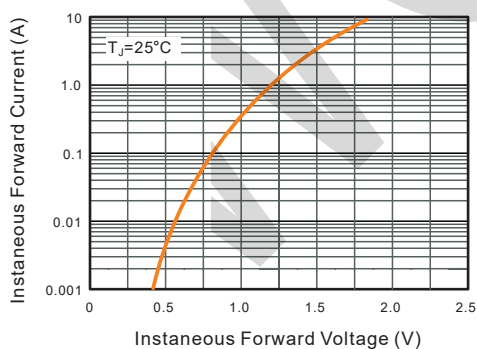


Fig.5 Typical Junction Capacitance

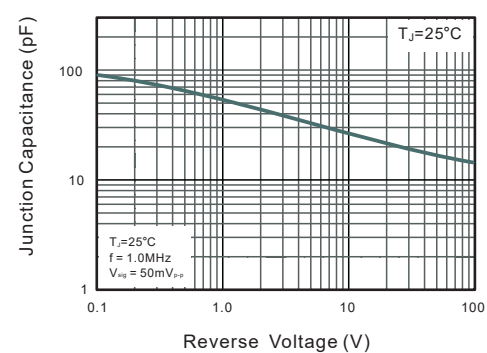

PACKAGE OUTLINE DIMENSIONS


TO-277

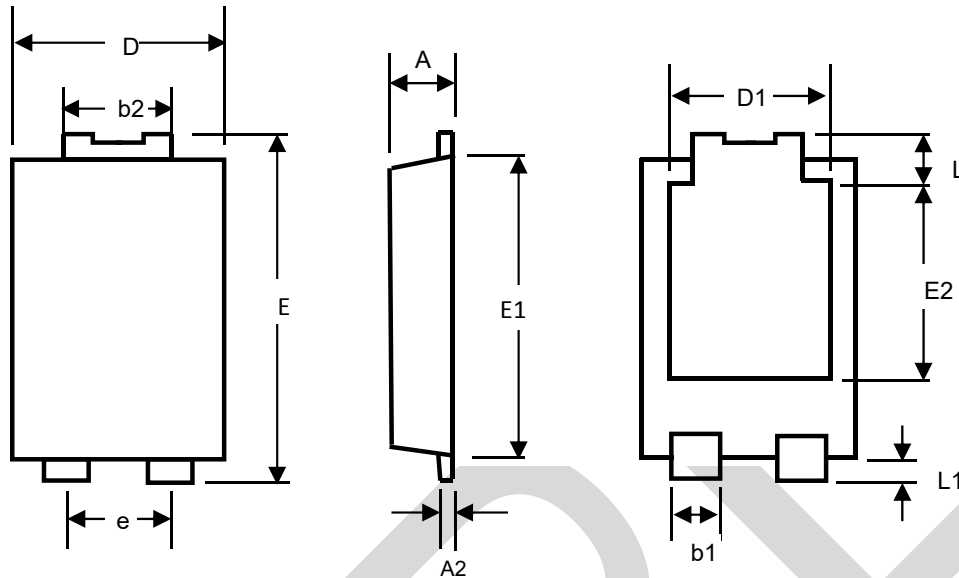

TO-277 Mechanical Data


UNIT		A	A2	b1	b2	D	D1	E	E1	E2	L	L1
mm	max	1.3	0.4	1.0	1.9	4.3	3.05	6.6	5.75	3.55	1.0	0.7
	min	1.1	0.2	0.8	1.7	3.9		6.4	5.3		0.8	0.5
mil	max	51.18	15.75	39.37	74.80	169.3	120.0	259.8	226.3	139.7	39.37	27.55
	min	43.30	7.87	31.49	66.93	153.5		252.0	208.6		31.49	19.69

TO-277 Suggested Pad Layout

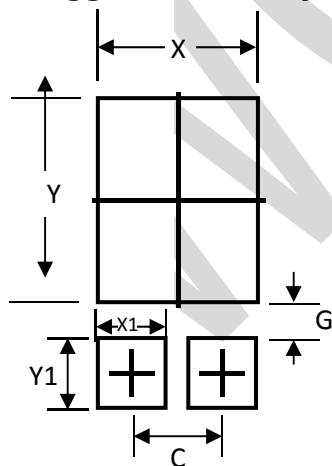

UNIT		C	G	X	X1	Y	Y1
mm	min	1.80	0.90	3.4	1.4	4.9	1.4
mil	min	78.86	35.43	133.86	35.43	192.91	55.12

Marking Information



①Product model :ES3JSP Referred to as ES3J

②PDC information:

Y X WW



WW:Week code(01 to 53)

X:Internal identification code


Y:Year code(ex:0=2020)

Packaging Information


1.Reel Dimensions



2. Inside Box



3. Outside Box

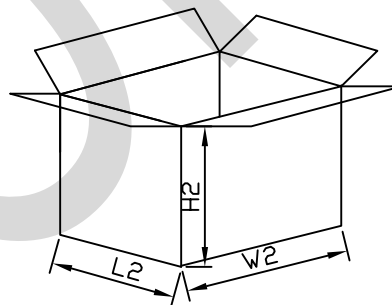

Packaging Information

NO	UNIT	Reel Dimensions			Inside Box			Outside Box		
Size	mm	ϕ	A	B	L1	W1	H1	L2	W2	H2
		330	70	15	335	335	43	360	360	360
QTY	PCS	Smallest package,5000PCS/reel			10,000PCS,2 reel in total			80,000PCS/carton,8 boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm									