

MURE4030CT

MURE4030CTF



03-Jun-2021

Epitaxial Superfast Recovery Rectifier

TO-220AB
MURE4030CT



ITO-220AB
MURE4030CTF



Features

- Low forward voltage drop
- Low leakage current
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Mounting position: Any

Parameter	Symbols	MURE4030CT	MURE4030CTF	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	300		V
Maximum RMS voltage	VRMS	210		V
Maximum DC Blocking Voltage	VDC	300		V
Maximum Average Forward Rectified Current	I(AV)	40.0		A
Maximum Reverse Recovery Time IF=0.5A, IR=1A, IRR=0.25A	Trr	50		ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	250		A
Max Forward Voltage at 5A and 25 °C	VF	0.93		V
Max Forward Voltage at 20A and 25 °C		1.15		
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=125 °C	IR	10 500		μA
Typical Junction Capacitance (Note1)	Cj	85		pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150		°C
Typical thermal resistance (Note 2)	RthJC	2	4	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.

Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

FIG.1 - FORWARD CURRENT DERATING CURVE

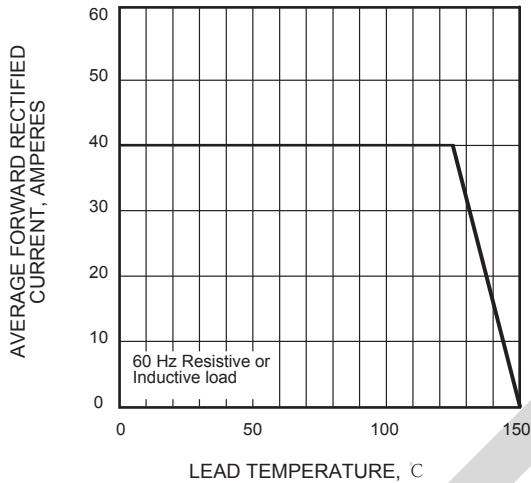


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

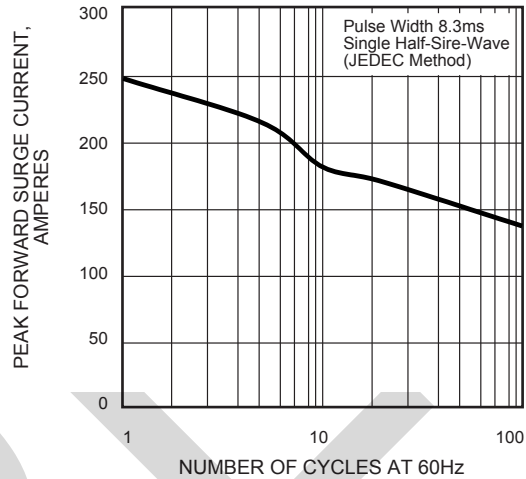


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


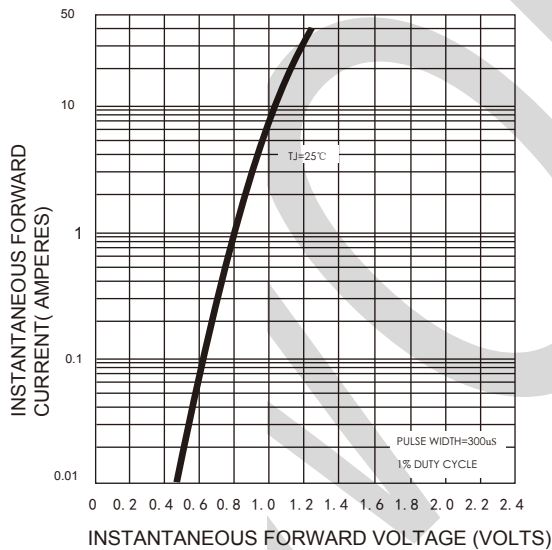



FIG.4 - TYPICAL REVERSE CHARACTERISTICS

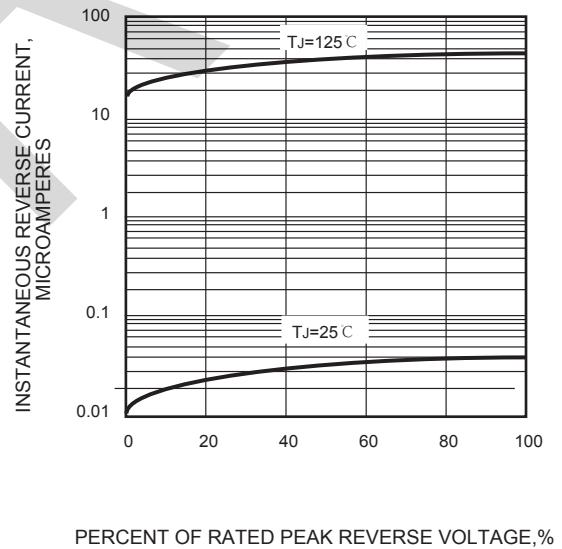


PACKAGE OUTLINE DIMENSIONS

Note:unit: mm


TO-220AB

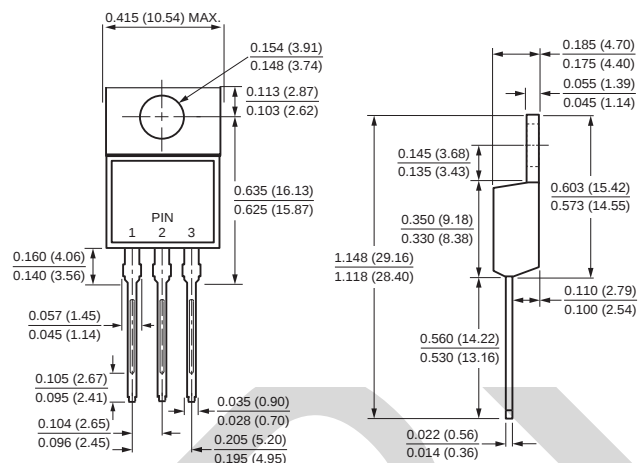

ITO-220AB

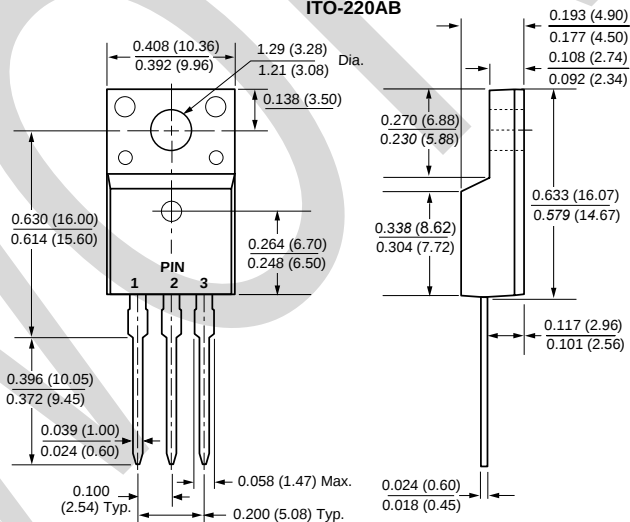

Marking Information

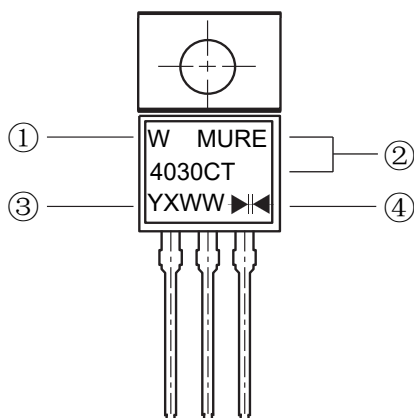

- ①W : Company's trademark
- ②Product model : MURE4030CT or MURE4030CTF
- ③PDC information:

Y X WW

WW:Week code(01 to 53)

X:Internal identification code

Y:Year code(ex:0=2020)

- ④▶◀ Double wafer