

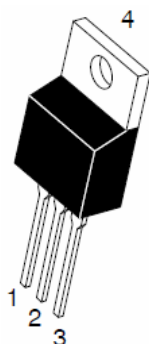


Superfast Recovery Rectifier

TO-220AB
MUR1620CT



ITO-220AB
MUR1620CTF

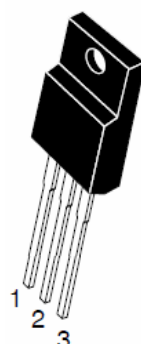

Features

- Low forward voltage drop
- Low leakage
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.054ounce, 1.549gram

Parameter	Symbols	MUR1620CT	MUR1620CTF	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	200		V
Maximum RMS voltage	VRMS	140		V
Maximum DC Blocking Voltage	VDC	200		V
Maximum Average Forward Rectified Current	I(AV)	16.0		A
Reverse Recovery Time. IF=0.5A,IR=1A,IRR=0.25A	Trr	35		ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	150		A
I ² t rating for fusing (1ms< t < 8.3ms)	I ² t	112.5		A ² S
Maximum Forward Voltage at 8.0A and 25 °C	VF	1.0		V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=100 °C	IR	10 100		μA
Typical Junction Capacitance (Note1)	Cj	65		pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150		°C
Typical thermal resistance (Note 2)	RthJC	2.5	3	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.

Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

Fig.1 Maximum Average Forward Current Rating

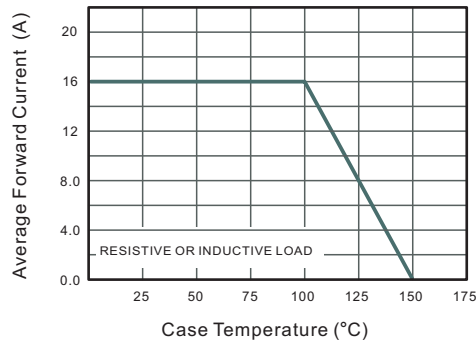


Fig.2 Typical Reverse Characteristics

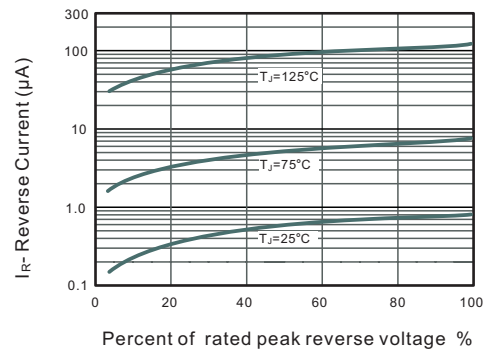


Fig.4 Typical Forward Characteristics

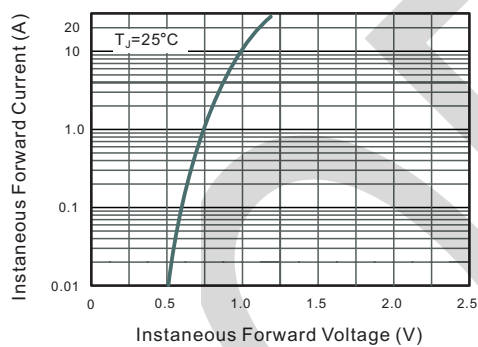


Fig.4 Typical Junction Capacitance


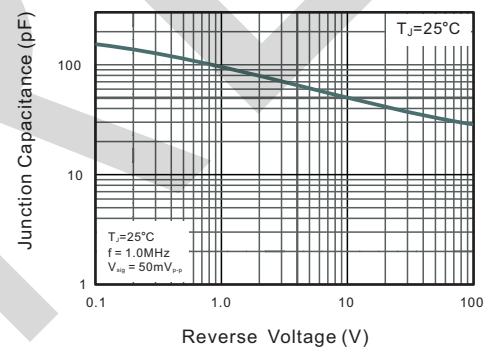



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

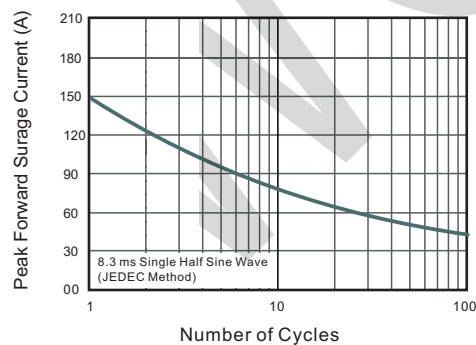


PACKAGE OUTLINE DIMENSIONS

Note:unit In(mm)


TO-220AB

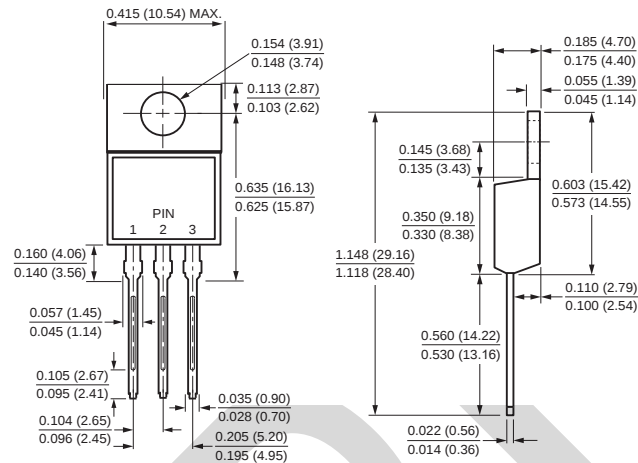

ITO-220AB

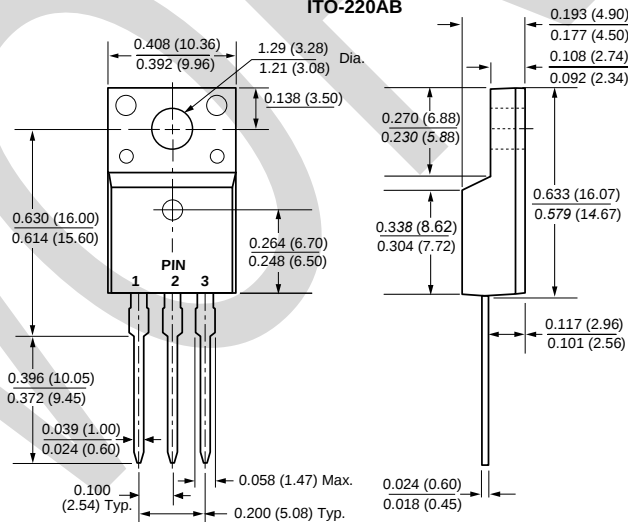


Marking Information

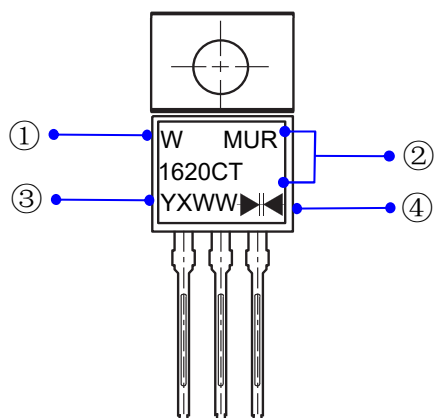

- ①W : Company's trademark
 ②Product model : MUR1620CT or MUR1620CTF
 ③PDC information:
 Y X WW
 WW:Week code(01 to 53)
 X:Internal identification code
 Y:Year code(ex:0=2020)
 ④  Double wafer


Packaging Information

1.Tube Dimensions

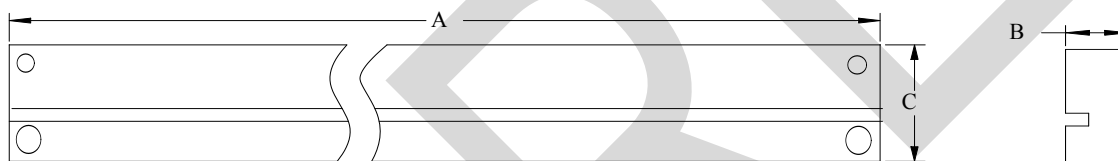

2. Inside Box

3. Outside Box

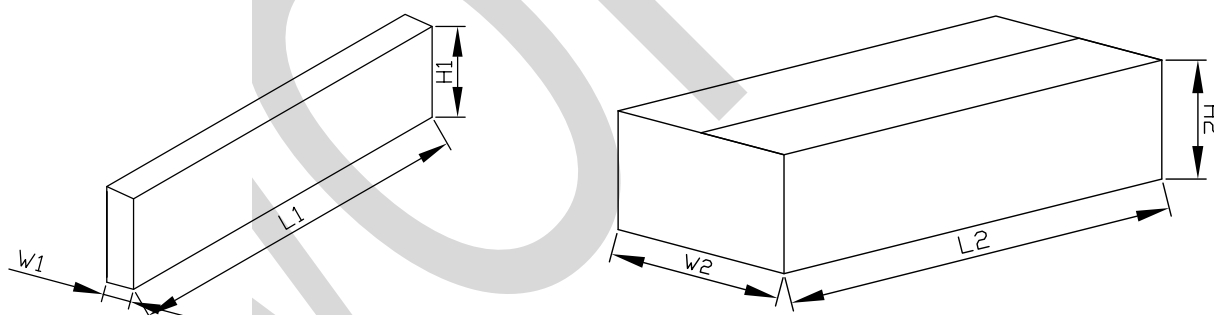

Packaging Information

NO	UNIT	Tube Dimensions			Inside Box			Outside Box		
Size	mm	A	B	C	L1	W1	H1	L2	W2	H2
		530	7	33	570	46	150	590	260	180
QTY	PCS	50PCS/Tube			Smallest package,1000PCS, 20 tube in total			5,000PCS/carton,5 boxes in total		
Note	Tolerance ≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm									